


## STATIC SCISSOR TABLE

- Capacities ranging from 500KG-6000kg+, Lift heights from 600mm-4300mm & Wide range of platform sizes available- all of this enables the end user to have a solution that exactly fits the application.
- Safety cut off bar and manual emergency lowering valve fitted on all units to improve safety.
- High quality robust construction gives added strength.
- Unit coated with a polyurethane lacquer preventing rusting
- These tables allow operators to adopt the correct working position and tackles topical Health and safety issues.



### Technical Features:

- Power supply 3 phase
- Control voltage: 24v on all functions including solenoid valve
- Push button control with 2500mm cable
- Box section scissor arms for greater side stability
- Manual emergency lowering
- Pressure compensating lowering valve
- Adjustable return valve
- Safety cut-off bar to prevent the table from lowering in the case of an obstruction
- Maintenance safety bar for service
- All models comply with safety regulations 950101, Advice Directive 89/392/EEC, Advice Directive 73/23/EEC

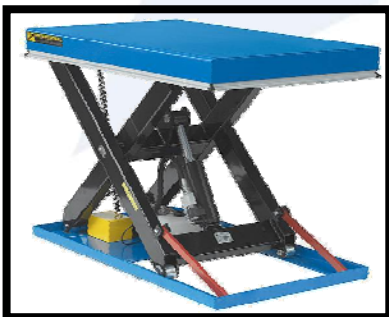

## Technical Specification:

### Single Scissor Tables

Reference	Capacity KG	Platform L x W	Travel	Closed Height	Lifting Speed
TR-BD-40001	500	950 x 600	600	180	8
TR-BD-40013	1000	950 X 600	600	180	14
TR-BD-40002	500	1350 X 800	820	180	12
TR-BD-40003	1000	1350 X 800	820	180	21
TR-BD-40004	1000	1500 X 1000	820	180	21
TR-BD-40005	1500	1350 X 800	820	230	24
TR-BD-40006	1500	1500 X 1000	820	230	24
TR-BD-40007	2000	1350 X 800	820	230	42
TR-BD-40008	2000	1500 X 1000	820	230	42
TR-BD-40009	3000	1350 X 800	820	250	18
TR-BD-40010	3000	1500 X 1000	820	250	18
TR-BD-40011	4000	1350 X 800	820	300	27
TR-BD-40012	4000	1500 X 1000	820	300	27
TR-BD-40021	1000	1700 X 900	1100	230	33
TR-BD-40022	1000	2000 X 1000	1100	230	33
TR-BD-40023	1500	1700 X 900	1100	230	38
TR-BD-40024	1500	2000 X 1000	1100	230	38
TR-BD-40025	2000	1700 X 900	1100	230	68
TR-BD-40026	2000	2000 X 1000	1100	230	68
TR-BD-40027	3000	1700 X 900	1100	260	28
TR-BD-40028	3000	2000 X 1000	1100	260	28
TR-BD-40029	4000	1700 X 900	1100	300	32
TR-BD-40030	4000	2000 X 1000	1100	300	32
TR-BD-40041	2000	2200 X 1200	1600	300	33
TR-BD-40042	2000	2200 x 1500	1600	300	33
TR-BD-40043	3000	2200 X 1200	1600	300	42
TR-BD-40044	3000	2200 X 1500	1600	300	42
TR-BD-40046	4000	2200 X 1200	1600	350	47
TR-BD-40047	4000	2200 X 1500	1600	350	47

### Double & Triple Vertical Tables

Reference	Capacity KG	Platform L x W	Travel	Closed Height	Lifting Speed
TR-BD-40101	1000	1350 X 1000	1600	450	26
TR-BD-40102	1500	1350 X 1000	1600	450	46
TR-BD-40103	2000	1350 X 1000	1600	450	46
TR-BD-40104	3000	1350 X 1000	1600	500	37
TR-BD-40111	1000	1700 X 1000	2200	450	30
TR-BD-40112	1500	1700 X 1000	2200	530	53
TR-BD-40113	2000	1700 X 1000	2200	530	53
TR-BD-40114	3000	1700 X 1000	2200	600	51
TR-BD-40121	1000	2200 X 1200	3000	530	42
TR-BD-40122	1500	2200 X 1200	3000	530	75
TR-BD-40123	2000	2200 X 1000	3000	530	75
TR-BD-40124	2000	2200 X 1200	3000	530	75
TR-BD-40125	3000	2200 X 1500	3000	700	71
TR-BD-40131	3000	2500 X 1300	3000	700	71
TR-BD-40132	1500	1700 X 1000	3300	700	53
TR-BD-40141	1000	2200 X 1200	4300	750	42

All dimensions are in mm unless otherwise shown