

Electric pallet truck model EGU PS 20

Capacity 2000 kg

Electrical drive, electrical lifting

Ideal unit for working on ramps or taking along on a lorry.

Features


- Multifunctional control handle for easy handling. The electric pallet lift truck will automatically be slowed down if the control handle is no longer in the users hand.
- Reliable impulse control for stepless regulation of driving speed.
- Slow moving function at upright handle position for the use in confined spaces.
- Battery size depends on the type of application.
- Anti crush safety device on handle.

Options

- Tandem rollers



Battery and battery charger are to be ordered separately.

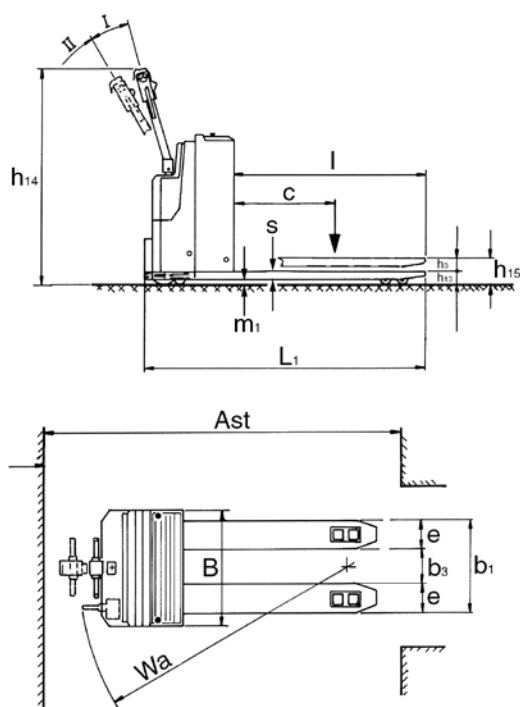

Technical data model EGU PS 20

Model	EGU PS 20
Art.-No.	040046842
Actuation	electric
Operation	pedestrian
Capacity, kg	2000
Load center c, mm	600
Wheelbase Y, mm	1373
Weight (with battery), kg	520
Tyre type*	PUR/PUR
Steering rollers l x d, mm	230 x 75 + 100 x 40
Load rollers l x d, mm	85 x 90
Number of wheels/load rollers (x=driven)	2+1x/2
Stroke h3, mm	115
Fork height max. h15, mm	200
Height of control handle max. h14, mm	1320
Fork height lowered h13, mm	85
Overall length L1, mm	1715
Length incl. apron L2, mm	567
Overall width B, mm	716
Fork height s, mm	55
Fork width e, mm	170
Fork length l, mm	1150
Outside dimension of forks b1, mm	550
Clearance fork tip-roller X	215
Aisle width pallet Ast, mm	2000
Turning circle radius Wa, mm	1575
Travel speed with/without load, km/h	6.0/6.0
Lifting speed with/without load, m/s	0.04/0.05
Lowering speed with/without load, m/s	0.05/0.04
Gradient with/without load, %	10/20
Service brake	electric
Drive motor rating, kW	1.2
Hoist motor rating, kW	2.2
Battery**	Pzs
Battery voltage, capacity at 20 h, V/Ah	24V/180-230 Ah
Type of control	impulse

*PUR... Polyurethane

**PzS... traction battery