




Licence exempt radio version of the popular Loadlink with 100 metres range.
 Supplied with easy to use two button handheld with push button control for tare and on/off
 Radiolink is fitted with standard alkaline batteries and has no external antenna.
 Calibrated in kg or tonnes, other units are available on request.
 May also be connected to a PC using our 'Desktop Controller' software package.
 All models are supplied with carry/storage case.

DIMENSIONS (SEE TABLE BELOW)

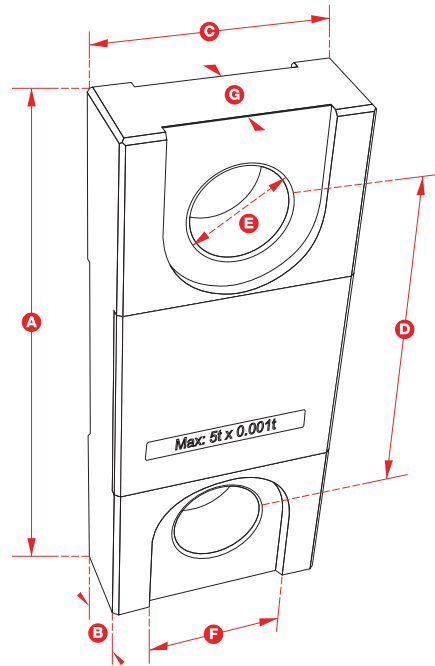

Part Number	RLP250KG	RLP500KG	RLP1T	RLP2T5	RLP5T	RLP12T	RLP25T	RLP50T	RLP100T	RLP200T	RLP250T
Capacity	250kg	500kg	1000kg	2.5t	5t	12t	25t	50t	100t	200t	250t
Resolution	0.05kg	0.1kg	0.5kg	0.001t	0.001t	0.002t	0.005t	0.01t	0.05t	0.1t	0.1t
Units	kg	kg	kg	t	t	t	t	t	t	t	t
Weight	1.5kg	1.5kg	1.5kg	1.5kg	2.2kg	3.5kg	5.2kg	10.9kg	37kg	80kg	80kg
Safety Factor	50:1	25:1	12:1	5:1	5:1	5:1	5:1	5:1	4:1	5:1	4:1
Battery Type	Handheld - 2 x AA Alkaline / Loadcell 4 x AA Alkaline										
Battery Life	Handheld - 400 hours / Loadcell 850 hours continuous										
Display Type	7 digit 8.8mm LCD										
Op Temp	-10 to 50c										
Accuracy	± 0.3% of applied load										
Frequency	2.4GHz										
Range	100 metres										
Data Rate	1 Update per second										
Protection	IP65										
Dimension A	204	204	204	204	249	305	340	424	608	690	690
Dimension B	43	43	43	43	43	47	60	75	99	150	150
Dimension C	101	101	101	101	101	101	110	163	255	305	305
Dimension D	146	146	146	146	165	193	215	230	320	350	350
Dimension E	24.5	24.5	24.5	24.5	38	47.5	55	76	108	125	125
Dimension F	47.5	47.5	47.5	47.5	66						
Dimension G	19	19	19	19	32						
Crosby Shackle	G210	G210	G210	G210	G210	G210	G210	G2140	G2140	G2140	G2140

Radiolink Accessories				
Part Number	T24-SO	T24-PR1	T24-SOSD	T24-A01i
Description	Base Station with RS232	Wireless tally roll printer	125mm LED display wireless	Base Station with analogue output

RADIOLINK PLUS