




**PULLEY TYPE 1A - WITH BRONZE BUSH - FOR WIRE OR FIBRE ROPE**

Cast iron with bronze bush for assembly into brackets.


Product code	PT1A500KG	PT1A1000KG	PT1A2000KG	PT1A3000KG
Capacity (kg)	500	1000	2000	3000
D (mm)	100	125	150	200
D1 (mm)	80	100	125	170
dL (mm)	19	22	30	40
dN (mm)	40	42	60	70
IN (mm)	23	24	29	40
b (mm)	21	22	26	37
b1 (mm)	14	16	18	26
R (mm)	6	6.5	7	10
Max rope diameter (mm)	10	12	13	18
Weight (kg)	0.6	0.9	1.7	3.7

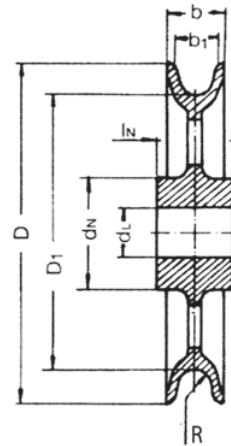

**ETT-74 PULLEY - FOR WIRE ROPE**

- With bearing and fixing bolt
- Material - galvanized cast iron

Product code			ETT-74-70	ETT-74-100	ETT-74-120	ETT-74-150	ETT-74-180	ETT-74-210	ETT-74-240	ETT-74-300
Diameter of pulley	D	mm	70	100	120	150	180	210	240	300
Load capacity		kg	200	300	400	500	500	800	800	1000
Max fleet angle	fleet angle	°	40	40	40	40	40	40	30	30
Rope diameter	Ø	mm	3	4	5	6,5	8	9	10	12
Width	N	mm	26	30	30	34	34	38	38	38
Fixing bolt		mm	8x45	10x55	12x60	14x65	14x65	16x70	16x70	16x70
	d	mm	56	83	100	130	160	185	206	265
Bore	B	mm	8,2	10,2	12,2	14,2	14,2	16,5	16,5	16,5
Number bearings			2	2	2	2	2	2	2	2
Weight per item		kg	0,37	0,6	0,9	1,6	2,0	3,4	4,0	6,5

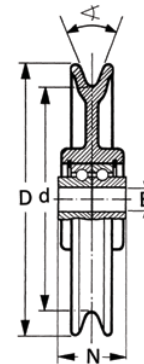

**ETT-74D PULLEY - FOR WIRE ROPE**

- Pulleys with twin grooves
- Material - galvanized cast iron
- With bearing and fixing bolt

Product code			ETT - 74 D-100	ETT - 74 D-120	ETT - 74 D-180	ETT - 74 D-210
Diameter of pulley	D	mm	100	120	180	210
Load capacity		kg	300	400	500	800
Rope diameter	Ø	mm	5	6	6,5	6,5
Distance groove/groove	g	mm	10	12	12	12
Width	N	mm	30	30	34	38
Fixing bolt		mm	10x55	12x60	14x65	16x70
	d	mm	86	106	162	192
Bore	B	mm	10,2	12,2	14,2	16,5
Weight per item		kg	0,8	1,2	2,3	3,3

